

Technical Data

SPS20000

Serial number:

DB-013

Version:07/2016

SANY PALFINGER SPV EQUIPMENT CO.,LTD
Rudong Development Zone, Nantong, Jiangsu, China
Service Hotline: +86 4008 878318
www.sanypalfinger.com


()

Subject to change, production tolerances have to be taken into account.

SPS20000B	F I G U R E C O N T R I B U T I O N S P S 2 0 0 0 0 B	3 8 2 0 k g
SPS20000C	F I G U R E C O N T R I B U T I O N S P S 2 0 0 0 0 C	4 1 1 0 k g

NOTE
The weight of the mounting kit was not included in the mentioned crane weight.

Subject to change, production tolerances have to be taken into account.

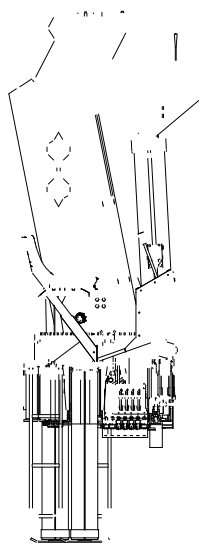
SPS20000C-F

NOTE
The low-seat is optional equipment.



Subject to change, production tolerances have to be taken into account.

SPS20000B

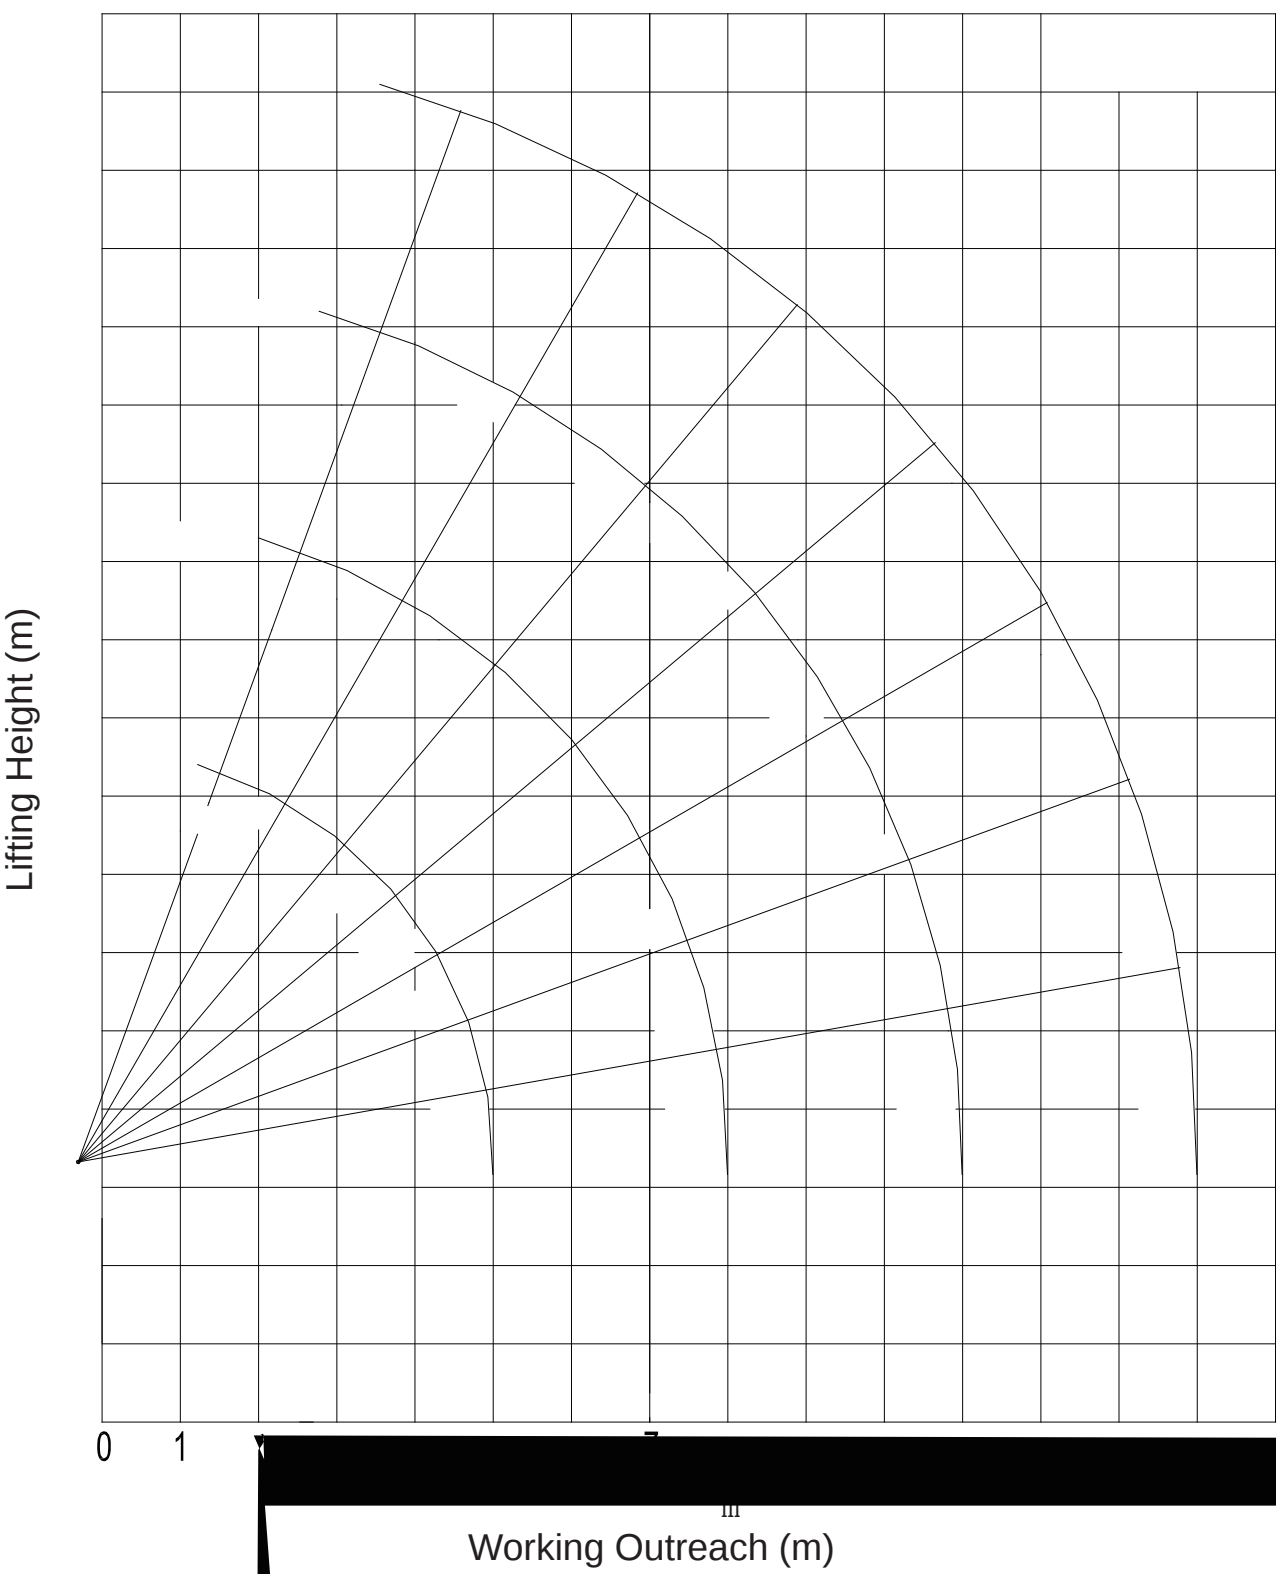

85%

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom. Allowance should be made for boom deflection under laden conditions. Lifting capacities must not exceed 85% of tipping load.

SPS20000B/SPS20000C



